

BAG END

TA6000-I TIME-ALIGN®

S P E C I F I C A T I O N S



SYSTEM COMPONENTS

Enclosure:

15 mm 11-ply birch plywood

Low Frequency Transducers:

2 - 6.5" Cone
1.5" Voice coil
30 oz. Magnet

High Frequency Transducer:

1" Exit compression driver
1.8" Titanium diaphragm
15 oz. Magnet
Radial horn

Input Connectors:

Cinch 142 screw terminal
barrier strip

Grille:

16 Gauge black vinyl
coated perforated steel

Standard Hardware:

Rigging points

Optional Hardware:

Forged steel eyebolts
Wall mount bracket
Steel yoke kit

ACOUSTIC AND ELECTRICAL

System Type:

2-way vented 0.6 ft³

Impedance:

8 Ω

Crossover Network:

Passive Time-Align® equalizer
type at 2.1 kHz

Time Offset Between Drivers:
< ± 25 Microseconds

Frequency Response:
95 Hz to 20 kHz ±3 dB
(4π Steradians)

Sensitivity:
95 dB SPL (1W @ 1m)

Dispersion:
80° Horizontal (-6 dB)
60° Vertical (-6 dB)
(Horn may be rotated 90° for
a 60°H x 80°V dispersion)

Power Handling:
150 W continuous sine wave
600 W instantaneous peak

PHYSICAL

Finish:
Black textured lacquer

Dimensions:
22.5" h x 9" w x 11" d
58 cm x 23 cm x 28 cm
Trapezoidal, 10° taper per side

Weight:
27 lbs.
13 kg

Shipping Dimensions:
28" x 16" x 16"
72 cm x 41 cm x 41 cm

Shipping Weight:
34 lbs.
16 kg

APPLICATIONS:

Audio Visual Presentations

Home Theater

Foreground Music Systems

Church Sound Reinforcement

Under Balcony Reinforcement

TA6000-I The TA6000-I is a compact speech range loudspeaker system offering both high fidelity and high efficiency. The Time-Aligned™ studio quality sound provides detail and clarity not found in other designs. For high power applications, the addition of an ELF™ subwoofer extends the capabilities to full range sound reinforcement. The TA6000-I is made from durable birch plywood coated with black textured lacquer. Included are rigging attachment points and a rugged steel grille. Attachment points are also provided for Bag End mounting bracket (BRKT-1), Bag End yoke (YOKE-1), and other popular mounting hardware.

About Time-Align® Time-Align® assures that the fundamental and overtones of a complex, transient, acoustical signal are presented to the listener in the same relationship as the electrical signal at the input terminals of the loudspeaker.

The conventional loudspeaker spreads out the sound in time: when a rapid series of transients occur the results are blurring and lost detail. With Time-Align®, a transient is presented as a tight package of energy, with the same time relationships as the natural sound. This means that a rapid series of transients will be heard clearly.

True Time-Alignment™ requires much more than just physically lining up the loudspeaker components. It requires consideration of the driver placement, driver delay and adjustment of the crossover delay parameters. This achieves the precise simultaneous acoustical arrival time of each driver throughout the crossover region.

Along with state-of-the-art laboratory instruments, the proprietary Time-Align® generator, built by Ron Wickersham, is used in designing our loudspeaker systems. The Time-Align® generator is founded upon different underlying mathematical principles than are used in the more common Fourier based measurement equipment.


When comparing a genuine BAG END Time-Aligned™ speaker system to any other, our additional design work is easy to hear and appreciate. The dramatic clarity, realism, and overall pleasant sound of our Time-Aligned™ loudspeakers is noted throughout the world.

CCI Solutions
be seen. be heard.

For more information or to order call
1-800-426-8664 or visit www.ccisolutions.com



TA6000-I

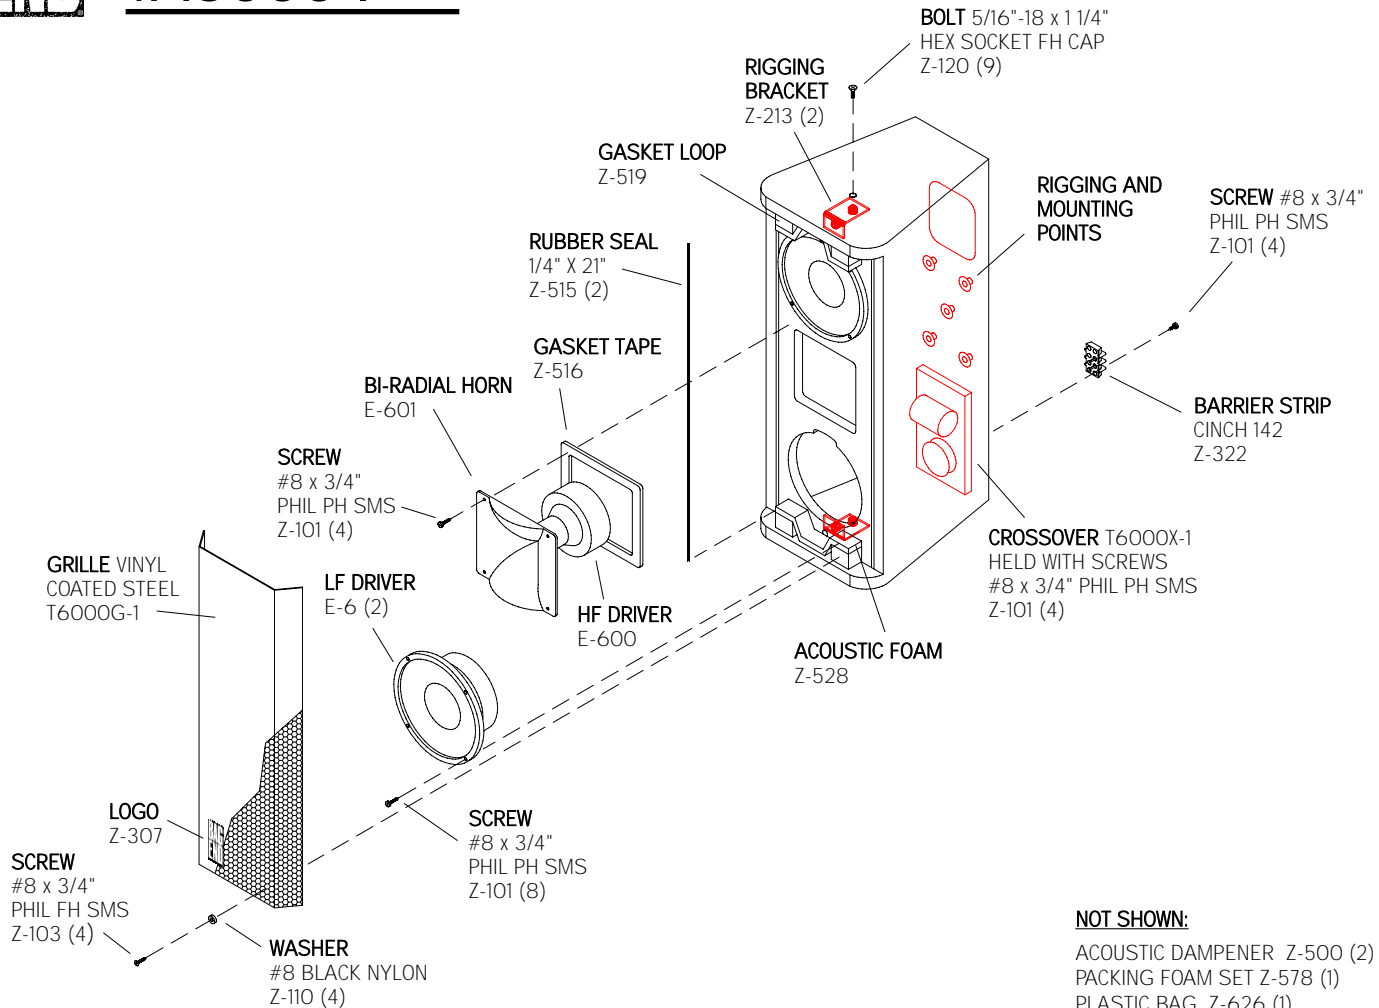

SYSTEM SCHEMATIC

