



Studio-Quality Sound in a World of Honky, Disgusting PA Speakers.

The SRM350 brings studio-monitor sound quality to a world inundated with big, inefficient PA speakers. This 2-way bi-amplified active loudspeaker easily out-performs the competitions' larger active models thanks to the combined efforts of the Mackie Active Engineering and world-class EAW Loudspeaker Design teams. With innovative Dynamic Bass Boost for full sound at all volume levels, a Contour control for precision response, and — most importantly — award-winning Mackie Active speaker design, the SRM350 is in a class all its own.

Features:

- 2-Way Bi-Amplified Active Loudspeaker System with unmatched sound
- Built-in 165-watt LF amplifier and 30-watt HF amplifier
- 121dB peak SPL output
- 61Hz to 22kHz frequency response @ -10dB
- Active electronics provide built-in equalization, phase alignment, crossover and protection circuitry
- Built-in combination Mic/Line input
- Wave-guide horn and direct radiating woofer for wide sound dispersion
- Contour control for added bass and high-end response
- Power On, Limit and Signal LEDs
- Rugged, lightweight, high-impact plastic enclosure
- Asymmetrical box design for PA and floor monitor applications
- Dynamic Bass Boost for rich, full lows at all volume levels
- Flyable or stand-mountable



Applications:

Ideal applications for the SRM350 include PA/music systems, corporate meeting rooms and halls, small nightclubs, coffee shops, small houses of worship, stage monitoring, remote broadcast and karaoke bars.

Dimensions:

CCI Solutions
be seen. be heard.

For more information or to order call
1-800-426-8664 or visit www.ccisolutions.com

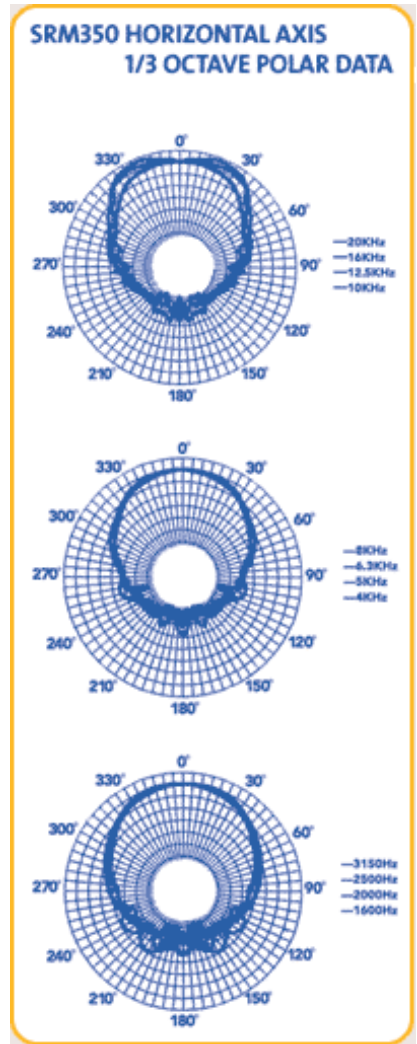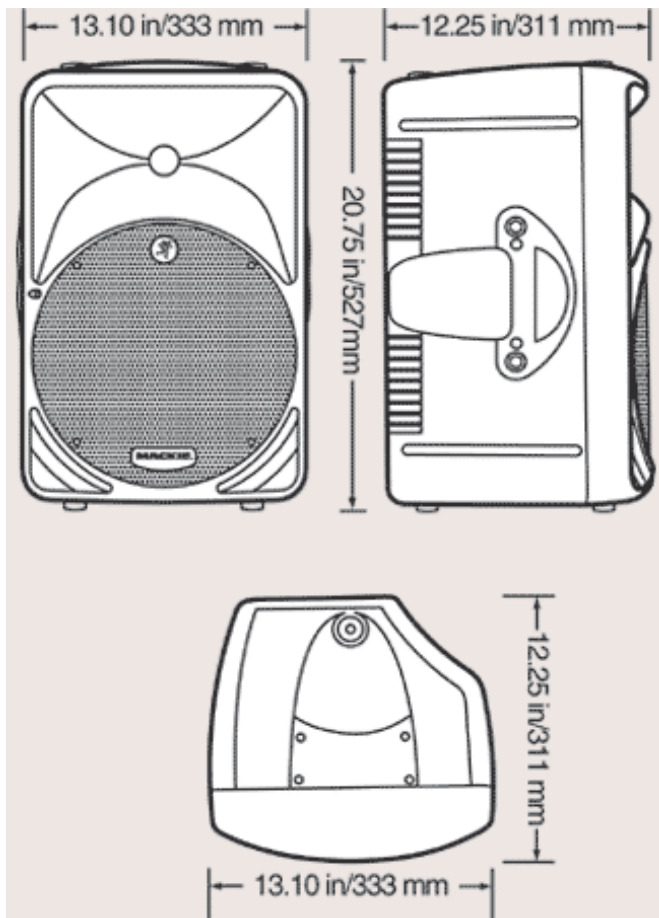

Copyright © 2005 LOUD Technologies Inc. All Rights Reserved.

CCI Solutions
be seen. be heard.

For more information or to order call
1-800-426-8664 or visit www.ccisolutions.com