

HyperDeck Studio Mini



HyperDeck Studio Mini is a portable broadcast quality deck that records ProRes onto commonly available SD cards. You get 6G-SDI for recording all formats up to 2160p30, dual SD card slots for non-stop recording, a built in LCD screen and familiar VTR style front panel controls, all in a design that can be used on the desktop or in 1/3 of a standard rack space! HyperDeck Studio Mini also features 720p and 1080p 4:4:4 file support with fill and key outputs so it can be used as source to provide broadcast graphics to live production switchers for downstream keying over live video!

\$695

Connections

SDI Video Inputs

1

SDI Video Outputs

2

SDI Rates

270Mb, 1.5G-SDI, 3G-SDI, 6G-SDI

HDMI Video Outputs

1 x HDMI type A connector.

Power over Ethernet

1 x Ethernet with Power over Ethernet

Analog Video Inputs

None.

Analog Video Outputs

None.

Analog Audio Inputs

None, embedded audio only.

Analog Audio Outputs

None, embedded audio only.

Timecode connection

None.

SDI Audio Inputs

16 channels embedded in SD and HD in QuickTime files.

SDI Audio Outputs

16 channels embedded in SD and HD in QuickTime files.

HDMI Audio Inputs

None.

HDMI Audio Outputs

8 channels embedded in SD, HD and UHD in QuickTime files.

Reference Input


Tri-Sync or Black Burst.

Reference Generator

Tri-Sync or Black Burst.

Computer Interface

1 x USB 2.0 type C for software updates and HyperDeck Utility software control. Please refer to either the Manual or the Information Note at www.blackmagicdesign.com/support for compatible media.

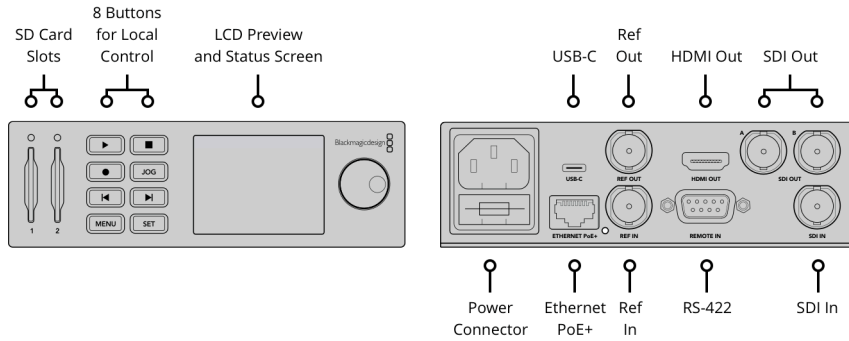

Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60
 1080PsF23.98, 1080PsF24,
 1080PsF25, 1080PsF29.97, 1080PsF30
 1080i50, 1080i59.94, 1080i60

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
 2160p29.97, 2160p30

SDI Compliance

SMPTE 259M, 292M, 296M and 425M

SDI Metadata Support

HD RP 188 and closed captioning.

Audio Sampling

Television standard sample rate of
 48kHz and 24-bit.

Video Sampling

4:4:4:4

Color Precision

10-bit

Color Space

REC 601, REC 709

Copy Protection

HDMI input is unable to capture from
 copy protected HDMI sources. Always
 confirm copyright ownership before
 capture or distribution.

Media

Media

2 x SD for SD, HD and Ultra recording.

Media Type

UHS II and able to support ProRes
 4444 playback and 422 recording.

Media Format

Can format discs to ExFAT (Windows/
 Mac) or OS X Extended (Mac) file
 systems.

Supported Codecs

DNxHD 220x, DNxHD 145, DNxHD 45,
 DNxHD 220x MXF, DNxHD 145 MXF,
 DNxHD 45 MXF, DNxHR HQX, DNxHR
 SQ, DNxHR LB, DNxHR HQX MXF,
 DNxHR SQ MXF, DNxHR LB MXF.
 ProRes 422 HQ QuickTime, ProRes
 422 QuickTime, ProRes 422 LT
 QuickTime, ProRes 422 Proxy
 QuickTime. ProRes 4444 QuickTime in
 HD for fill and key playback, H.264.

Computer Capture

None

FTP Clients

Cyberduck, Transmit, FileZilla

Control

Built-in Control Panel

8 buttons for menu control, 2.2 inch color display, and a rotary wheel.

External Control

RS-422 deck control, SDI start/stop, timecode run. Includes Blackmagic HyperDeck SDK and Ethernet HyperDeck Control Protocol. Supports remote FTP file upload.

Software

Software Included

Media Express, Disk Speed Test, Blackmagic System Preferences and Blackmagic driver (Mac only).

Internal Software Upgrade

Firmware built into software driver. Loaded at system start, or via updater software.

displays

Built in LCD for video, audio and timecode monitoring and menu settings

2 x LED indicator lights above the SD slots.

Physical Installation

1/3 rack unit size. Less than 7 inches deep.

Operating Systems



macOS 10.12 Sierra,
macOS High Sierra 10.13 or later.



Windows 8.1 or
Windows 10.

Power Requirements

Power Supply

1x Internal 100 - 240V AC.

Physical Specifications



Environmental Specifications

Operating Temperature:

5° to 50° C (41° to 122° F)

Storage Temperature:

-20° to 45° C (-4° to 113° F)

Relative Humidity:

0% to 90% non-condensing

What's Included

HyperDeck Studio Mini.

SD card with software and user manual.

Warranty

12 Month Limited Manufacturer's
Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2018, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller