

The PLX2 series is a range of premium quality, high-power amplifiers designed for the most demanding live performance uses. Built on the third generation of QSC PowerLight technology, PLX2 amplifiers combine light weight, superlative audio quality and proven QSC reliability. With power output up to 3,600 watts, PLX2 amplifiers are capable of providing ample clean, undistorted output to the most power hungry speaker systems.

PowerLight switchmode technology replaces a heavy AC transformer (typically 20 lbs / 9 kg) with an efficient, lightweight active design. Conventional AC transformers provide 60 energy pulses per second. The PowerLight supply delivers 100,000 pulses per second. More pulses per second means more on-demand power to the amplifier's output section. The power supply doesn't "sag" so bass notes stay full and powerful while the high end remains transparent and clean.

PLX2 series amplifiers have the refined but rugged good looks of professional power tools and high power machinery. A solid, cast-aluminum front panel adds style to any rack while acting as an integral I-beam, rigidly tying the chassis together for years of on-the-road reliability.

The PLX2 series now includes two approaches to meet a wider range of needs and budgets. The fully featured "02" models (1802, 2502, 3102, 3602) drive 2Ω loads and add subwoofer processing and convenient rear-panel signal processing control switches to the original, still unmatched PLX platform. In addition, the compact "04" models (1104, 1804) have been added to bring the same performance and technology, plus even greater value, to applications that don't require bridged or 2Ω operation.

PLX2 Power Amplifiers

Model	Stereo (watts per channel)			Bridged (watts) 4Ω**
	8Ω*	4Ω*	2Ω**	
PLX1104	325	550	–	–
PLX1804	600	900	–	–
PLX1802	330	575	900	1800
PLX2502	450	750	1250	2500
PLX3102	600	1000	1550	3100
PLX3602	775	1250	1800	3600

*1 kHz, 0.1%THD, both channels driven

**1 kHz, 1%THD, both channels driven



Features - All Models

- Very light weight ("02" models, 21 lbs/9.5 kg, "04" models 13 lbs/5.9 kg).
- Cooling design exhausts hot air out the front, keeping the rack cool. Flow-through heat sinks require no filters that could become clogged.
- Front panel LED power, clip, -10 dB, and signal present indicators for system monitoring and troubleshooting. 02 models also feature bridge and parallel mode LED indicators.
- Speakon® NL-4 output connectors provide a positive-locking speaker connection. Ch 1 output uses all 4 wires for single-cable connection to bi-amplified speakers.
- 21-position front-panel gain controls for precise, repeatable amplifier adjustment.
- Balanced XLR inputs with parallel TRS connectors accommodate all common input connectors and support loop-through operation.

04 Models


- Value combined with uncompromised PLX technology, quality and performance for applications that don't require bridged or 2Ω stereo operation.
- Two models with power ratings up to 900 watts / channel at 4Ω.
- Clip limiting protects speakers; thermal limiting maintains operation even during abnormal overloads.

02 Models

- Speakon® NL4 and binding post outputs.
- 100 Hz high pass and low pass filters for bi-amping subwoofer and satellite systems without the need for an external crossover.
- Switchable/defeatable 33 Hz infrasonic filters protect woofers from over-excursion damage.
- Switchable/defeatable clip limiters.
- Four models with power ratings up to 1800 watts / channel at 2Ω, 3600 watts bridged at 4Ω.

	PLX1104	PLX1804	PLX1802	PLX2502	PLX3102	PLX3602
Stereo Mode (both channels driven)*						
8Ω FTC 20 Hz - 20 kHz 0.05% THD	310	550	320	425	550	725
8Ω EIA 1 kHz 0.1% THD	325	600	330	450	600	775
4Ω FTC 20 Hz - 20 kHz 0.05% THD	500	800	525	675	900	1100
4Ω EIA 1 kHz 0.1% THD	550	900	575	750	1000	1250
2Ω EIA 1 kHz 1% THD	—	—	900	1250	1550	1800
Bridge Mono Mode*						
8Ω 20 Hz - 20 kHz 0.1% THD	—	—	1100	1400	1900	2500
8Ω EIA 1 kHz 0.1% THD	—	—	1200	1500	2100	2600
4Ω 1 kHz 1% THD	—	—	1800	2500	3100	3600
Signal to Noise (20 Hz - 20 kHz)	-106 dB	-106 dB	-107 dB	-106 dB	-107 dB	-107 dB
Input Sensitivity at 8Ω	1.18 Vrms	1.20 Vrms	1.28 Vrms	1.15 Vrms	1.23 Vrms	1.25 Vrms
Voltage Gain at 8Ω	32.5 dB	35 dB	32 dB	34 dB	35 dB	36 dB
Output Circuitry	AB	2-Step Class H	AB	2-Step Class H	2-Step Class H	2-Step Class H
Power Requirements (1/8 power, pink noise at 4Ω)	8A/120V	9.4A/120V	8.7A/120V	7.5A/120V	9.5A/120V	11.5A/120V
	04 MODELS			02 MODELS		
Distortion (SMPTE-IM)	Less than 0.02%			Less than 0.02%		
Distortion (typical)						
1/8 rated power, 20 Hz - 20 kHz	Less than 0.02%			Less than 0.02%		
Full rated power, 20 Hz - 20 kHz	Less than 0.02%			Less than 0.02%		
Damping Factor	Greater than 200			Greater than 500		
Input Impedance	10k ohms unbalanced / 20k ohms balanced			10k ohms unbalanced / 20k ohms balanced		
Input Clipping	5.5 Vrms (+15 dBu)			11 Vrms (+21 dBu)		
Cooling	Variable-speed fan, rear-to-front air flow			Variable-speed fan, rear-to-front air flow		
Input Connectors, each channel	3-pin XLR and 1/4" TRS balanced, parallel			3-pin XLR and 1/4" TRS balanced, parallel		
Output Connectors, each channel	Neutrik® NL4 Speakon® Both channels available on Ch 1 NL4 connector			Neutrik® NL4 Speakon® and touch-proof binding posts. Both channels available on Ch 1 NL4 connector		
Amplifier Protection	Full short circuit, open circuit, thermal, infrasonic, ultrasonic, and RF protection. Stable into reactive or mismatched loads			Full short circuit, open circuit, thermal, infrasonic, ultrasonic, and RF protection. Stable into reactive or mismatched loads		
Load Protection	On/off muting, DC-fault power supply shutdown			On/off muting, DC-fault power supply shutdown		
Dimensions						
Height	3.5" (8.9 cm) - 2 rack units			3.5" (8.9 cm) - 2 rack units		
Width	19" (48.3 cm)			19" (48.3 cm)		
Depth - Rack mounting surface to rear	8.95" (22.7 cm)			12.8" (32.6 cm)		
- Overall	11" (27.9 cm)			14.875" (37.9 cm)		
Weight - Shipping / Net	18 lbs (8.2 kg) / 13 lbs (5.9 kg)			26 lbs (11.8 kg) / 21 lbs (9.5 kg)		
Agency Approvals	CCC, CB, CE, FCC, KET1, cUL, UL			CCC, CB, CE, FCC, KET1, cUL, UL		

* CE versions may have up to 12% (0.5 dBw) less power due to special construction to meet EN-61000 AC harmonic limits

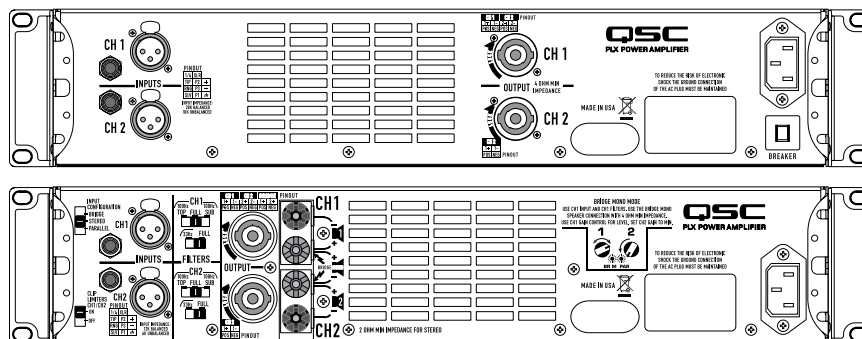

04 MODELS

02 MODELS

Specifications subject to change