

Teranex Mini SDI to Analog 12G



Convert from 12G-SDI to Analog. Use SD, H analog video output. Built in down converter lets you connect ultra HD sources to component video equipment in SD or HD. Allows you to connect analog equipment including Betacam SP, VHS, and video monitors.

Connections

SDI Video Inputs

1 x 12G-SDI SD/HD/2K/4K auto switching.

SDI Video Outputs

1 x 12G-SDI loop output.

Analog Video Outputs

Composite, Y/C or Component.

Analog Audio Outputs

2 channels professional balanced analog audio via XLR connectors. Right XLR can be configured for timecode output.

Digital Audio Outputs

4 channels professional 110Ω balanced digital audio via XLR connectors. Right XLR can be configured for timecode output.

Embedded Audio Support

16 channels.

Multi Rate Support


Automatic switching between SD/HD/2K and 4K.

Updates and Configuration

USB or Ethernet.

Reclocking

Yes

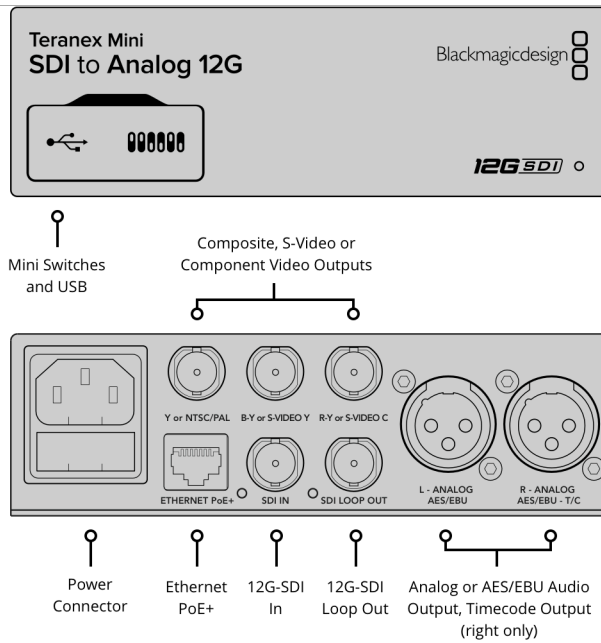

Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60 1080PsF23.98,
 1080PsF24, 1080PsF25,
 1080PsF29.97, 1080PsF30 1080i50,
 1080i59.94, 1080i60

2K Video Standards

2K DCI 23.98p, 2K DCI 24p, 2K DCI
 25p
 2K DCI 23.98PsF, 2K DCI 24PsF, 2K
 DCI 25PsF

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
 2160p29.97, 2160p30, 2160p50,
 2160p59.94, 2160p60

4K Video Standards

4K DCI 23.98p, 4K DCI 24p, 4K DCI
 25p

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE
 296M, SMPTE 372M, SMPTE 424M,
 SMPTE 425M Level A and B, SMPTE
 2081-1, SMPTE 2081-10, SMPTE
 2082-1 and SMPTE 2082-10

SDI Video Rates

SDI video connections are auto
 switching between standard
 definition SDI, high definition level A
 and level B 3G-SDI, 6G-SDI, and 12G-
 SDI.

SDI Video Sampling

4:2:2 and 4:4:4

SDI Audio Sampling

Television standard sample rate of 48
 kHz and 24-bit.

SDI Color Precision

4:2:2 and 4:4:4

SDI Color Space

YUV

Analog Video Standards

525i59.94 NTSC, 625i50 PAL

Analog Color Space

REC 601, REC 709

Analog Color Precision

YUV 4:2:2 and RGB 4:4:4 in HD, 2K
 and 4K.

Format Conversion

HD down conversion

Software

Software Control

Mac OS X™ and Windows™ software upgrade via USB and Ethernet.

Internal Software Upgrade

Via included updater application.

Operating Systems



macOS 10.12 Sierra,
macOS High Sierra 10.13 or later.



Windows 8.1 or Windows 10.

Settings Control

Basic Settings Control

Mini Switches, USB and Ethernet via free software utility.

Optional Front Panel Control

Front mounted Smart Panel with LCD, rotary knob and six settings buttons

Power Requirements

Power Supply

1 x built-in international AC power supply with IEC C14 inlet. IEC Power cable required. 90 - 240V AC Input.

Power Over Ethernet

Can be powered via 48V DC using PoE+ (power over ethernet).

Power Consumption

16 Watts

Operational Voltage Range

90 - 240V AC

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 40°C (32° to 104°F)

Storage Temperature

-20° to 60°C (-4° to 140°F)

Relative Humidity

0% to 90% non-condensing

What's Included

Teranex Mini SDI to Analog 12G
SD card with software and manual

Warranty

3 year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2018, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller